

Multi-Pure

Whole House Water Treatment System

Installation, Operation and Maintenance Manual

Multi-Pure Model TO15000



Warning

Please read manual carefully before proceeding with installation.

It is recommended that the Multi-Pure TO15000 Water Treatment System be installed by a professional plumber.

Save Manual for future reference.

Thank you for your purchase of Multi-Pure's Model TO15000 Whole House Water Treatment System. The TO15000 System is designed to aesthetically improve the quality of the water used throughout your entire home. With proper installation and maintenance, this system will provide you with better water for years to come. If you have any questions or concerns, please contact our Customer Service Department at 1-800-622-9206 or email custsvc@multipure.com.

Table of Contents

Warranty	2
Installation Overview	3
Operational Parameters and General Operating Instructions	4
Installation Guidelines	5
To Operate - Start-up and Use	6
Filter Maintenance	7

MULTI-PURE CORPORATION WARRANTY - Model TO15000

MULTI-PURE 90-DAY GUARANTEE:

Multi-Pure demonstrates its confidence in the performance of the Multi-Pure Water Treatment System, Model No. TO15000 by offering its 90 day money-back guarantee. If you should find the Water Treatment System unsatisfactory, let us know within thirty days of purchase, and we will promptly exchange it or refund your money.

MULTI-PURE WARRANTY:

Multi-Pure Corporation warrants to the original retail customer its TO15000 Water Treatment System to be free of defects in material and workmanship for use under normal care, and will repair or replace any System at no charge (excluding transportation to Multi-Pure headquarters) to the customer for a lifetime (provided that the filters have been changed at least once per year). All exterior attachments to the TO15000 are also warranted for defects in material and workmanship for one year.

Multi-Pure Filters (cartridges) are warranted for defects in material and workmanship for use under normal care. For optimum performance, filter cartridges require periodic replacement dependent upon use and local water conditions; therefore, it is recommended that filters be replaced at least once every six months or sooner if needed.

EXCEPT AS OTHERWISE EXPRESSLY PROVIDED ABOVE, MULTI-PURE CORPORATION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, ARISING BY LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TO ANY PERSON. THIS LIMITED WARRANTY MAY NOT BE ALTERED, VARIED OR EXTENDED EXCEPT BY A WRITTEN INSTRUMENT EXECUTED BY MULTI-PURE CORPORATION. THE REMEDY OF REPAIR OR REPLACEMENT AS PROVIDED UNDER THIS LIMITED WARRANTY IS EXCLUSIVE. IN NO EVENT SHALL MULTI-PURE CORPORATION BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES TO ANY PERSON WHETHER OCCASIONED BY NEGLIGENCE OF THE MANUFACTURER, INCLUDING WITHOUT LIMITATION DAMAGES FOR LOSS OF USE, COST OF SUBSTITUTION, PROPERTY DAMAGE, OR OTHER MONETARY LOSS.

Multi-Pure Model TO15000 Water Treatment System Installation Overview & Part List

It is recommended that the TO15000 be installed by
a licensed, professional plumber.

Item #	Description	Part No.
1	Housing Lid with 3/4" inlet/outlet ports	MCL30000
2	Housing Bottom	MCB15000
3	Replacement Filter	TO20
4	Bracket (not shown)	MC128MM
5	Hand tool (not shown)	MC259
All other components must be supplied by purchaser or plumber		



Operational Parameters

TO15000 Specifications	
Housing Composition	High Impact Polypropylene Plastic
Rubber Items	Buna N & Paracryl
Inlet	3/4"
Outlet	3/4"
Replacement Filter	Model TO20
Filter Cartridge size	4 9/16" x 20"
Filter Cartridge weight	5 lbs 12 oz
Approximate Capacity	15,000 Gallons*
Approx. Flow Rate	6.5 gpm @ 60 psi
Max. Water Pressure	90 psi max/30 psi min
Weight (Basic Unit)	12 lbs.
Height	23 1/2 inches
Body diameter	7 5/16 inches

* The life of the filters will vary depending on the amount of water used and the level of particulate matter in the water processed. It is recommended that the filters be replaced at an interval of every three to six months.

General Operating Instructions

- ✓ The TO15000 Whole House System is designed to be most effective on municipally treated water.
- ✓ For cold water use only.
- ✓ Maximum water pressure is 90 psi.
- ✓ The housing (unit) operates in an upright position. For ease of changing filters, please leave at least a 4 inch (4") clearance at the bottom of the housing (between the housing bottom and the floor).
- ✓ The TO15000 must be protected from freezing. Do not allow water to freeze in the unit. If unit is exposed to freezing temperatures, drain water from unit and remove the filter.
- ✓ Do not allow water to sit in unit for extended periods of time (10 or more days) without being used. If unit is left unused for more than 10 days, drain all water from system and remove the filter. In the event water does sit in the unit for 10 or more days, the system should be flushed by allowing water to flow to waste for about 5 minutes. It is always advisable to flush all of the water pipes in your home whenever water has been standing in the pipes for an extended period of time.
- ✓ If your water has a noticeable amount of large particulate matter (sand, dirt, leaves, etc.), it is recommended that a Sediment Filter (purchased separately) be installed before the TO15000, which would extend the useful life of the TO20 replacement filter (cartridge) for the TO15000.
- ✓ The TO15000 Whole House unit uses filter Model No. TO20. The life of the filter will vary depending on the amount of water used and the level of particulate matter in the water processed. Replace the filter cartridge when the flow rate diminishes, the filter becomes saturated with bad tastes and odors, or about every three to six months.

IMPORTANT NOTICE

The installation of a Whole House Water Treatment System will cause a reduction in the water flow rate or pressure. Flow rate/pressure drop will vary depending upon the size of pipe in your home, the number of fittings and outlets, the height to which the water must be delivered, etc.

You will see a noticeable water pressure drop if multiple outlets (toilets, showers, dishwashers, etc.) are open (in use) at the same time.

IT IS RECOMMENDED THAT THE TO15000 BE INSTALLED BY A LICENSED, PROFESSIONAL PLUMBER. ALSO, FOR EASE OF INSTALLATION, IT IS RECOMMENDED THAT THE TO15000 SYSTEM BE INSTALLED WITH AN OPTIONAL BYPASS VALVE KIT

Installation Guidelines

The following are guidelines for installing the TO15000 to the main water supply line for the whole house **WITHOUT** the use of the optional bypass valve kit.

A. Prepare the TO15000 housing lid for installation:

1. Open the housing, using the handtool if necessary.
2. Remove the housing bottom and filter from the lid.
3. Attach the bracket to the housing lid.
4. Mount the bracket (with lid attached) to a wall or post as close to the house plumbing as possible.





NOTE: Allow at least a 4" clearance at the bottom for changing the filters.

B. Prepare the House Plumbing for installation (parts supplied by plumber):

1. Locate the main water supply line that supplies all water going into the house.
2. Shut off water to the house. Close all faucets in the house to avoid back flow of the water.
3. Disconnect or sever the water line (if a pressure regulator is installed, make the connection after the regulator - between the regulator and the house).
4. Install the necessary plumbing to enable you to connect the water supply line to the TO15000 unit.
5. Connect the **inflowing** water line to the **IN** (inlet) port of the TO15000 unit.
6. Then connect the **OUT** (outlet) port on the TO15000 housing lid to the **outflowing** water pipe, the pipe going into the house.

C. Installation of the Housing Bottom and Filter:

1. Check the filter cartridge to:
 - a. Confirm that the white rubber washer is in the groove around the filter nipple (top of filter) and that the two black orings are in place on the nipple.
 - b. Confirm that the white rubber washer is in the groove in the center of the bottom cap on the filter.
2. Insert the filter nipple in the center port inside the housing top. When the filter is fully inserted, it should stay in place.
3. Check the large oring around the mouth of the housing bottom to confirm that it is in place.
4. Reconnect the housing top and bottom by sliding the bottom up and over the filter. Turn the housing bottom until it is tightly sealed.

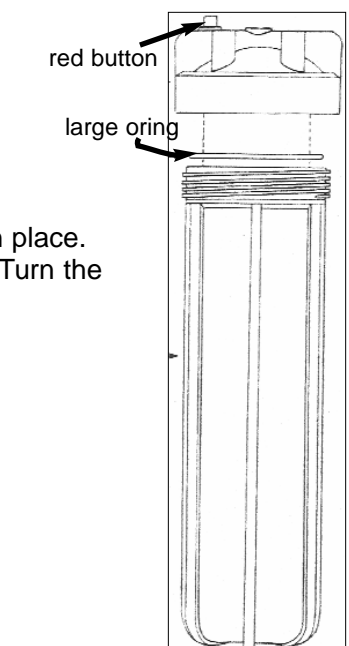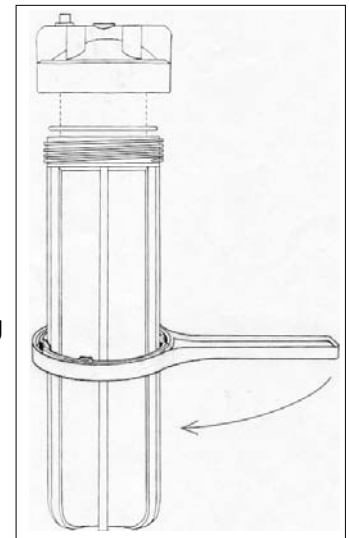

D. To Operate the TO15000 System

1. Open one cold water faucet in the house, preferably the faucet that is located nearest the TO15000 installation.
2. Turn on house water going to the TO15000 unit.
3. Press and hold red air vent button while the unit is filling with water to assure that all air escapes from the housing. Hold the button until a steady stream of water escapes.
4. Turn off the faucet you opened in the house, and check all connections to confirm that there are no leaks.
5. Reopen the cold water faucet in the house nearest the TO15000 installation. Allow the water to flow to waste at the open faucet for about 3 to 5 minutes to flush the filter.
6. Then turn off the faucet that you opened.
7. Check all connections to confirm that there are no leaks.



Your TO15000 Water Treatment System is now ready to provide clean, clear water at every tap and appliance throughout your home. The TO15000 System effectively reduces dirt, rust, sand, algae, and chlorine, improving the smell, taste and odor, and overall quality of water for bathing or showering, and all other household water needs.

For the highest quality drinking water, Multi-Pure Corporation recommends the installation of one of the Multi-Pure Drinking Water Systems at the kitchen sink in addition to the Whole House Water Treatment System. Multi-Pure's Drinking Water Systems go beyond solving aesthetic water problems; they also remove from the water supply contaminants of health concerns.

If you have questions regarding the installation of your Multi-Pure Whole House Water Treatment System, contact your plumber and / or call:

**Multi-Pure Corporation
Customer Service Department
toll-free at 1-800-622-9206, ext. 175
email: custsvc@multipure.com
www.multipure.com**

Filter Maintenance

The TO15000 Whole House Water Treatment System uses **filter Model No. TO20**. The life of the filter will vary depending on the amount of water used and the level of particulate matter in the water processed. It is recommended that filters be replaced on a regularly scheduled basis -- when the **first** of the following occurs:

- (a) when the flow rate diminishes, or
- (b) when the filter becomes saturated with bad tastes and odors, or
- (c) about every three to six months.

If you have any questions regarding the replacement of your Model TO20 filter, please call Multi-Pure's Customer Service Department.

**For Replacement Filters: Call 1-800-622-9208 or go to
www.multipure.com/rf.htm**

Other Multi-Pure Products

Multi-Pure Corporation offers other drinking water and water treatment devices designed to improve the quality of your water. For complete information about Multi-Pure Drinking Water Systems, visit **www.multipure.com** or call our Customer Service Representatives at 800-622-9206 for additional information.